


D5

CEILING TILES LAY-OUT

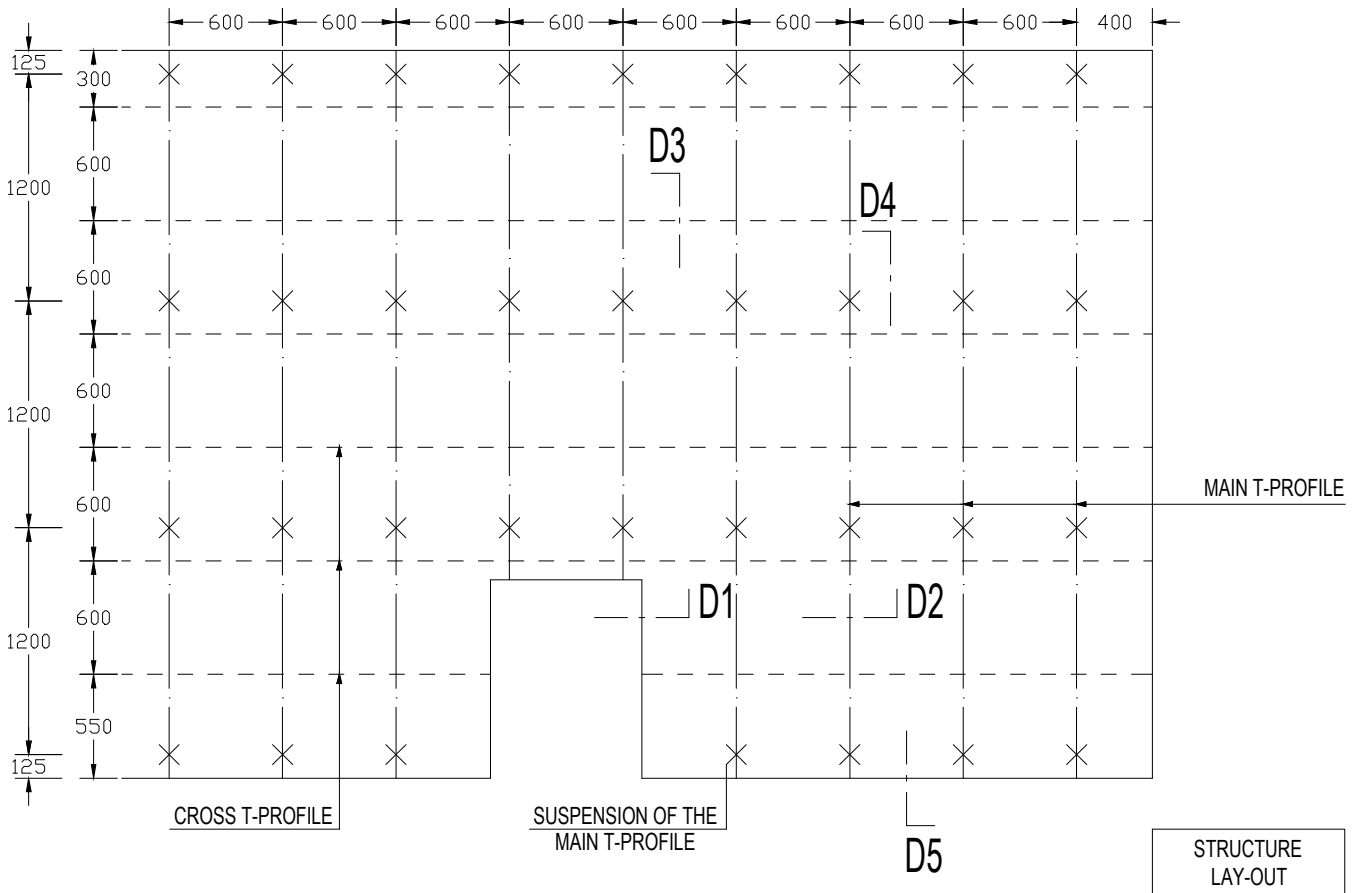


CROSS T-PROFILE


SUSPENSION OF THE MAIN T-PROFILE

D5


STRUCTURE LAY-OUT

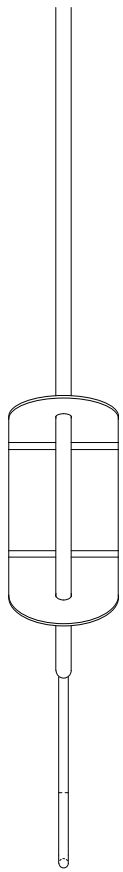


RAPID HANGER  
(non HD) front

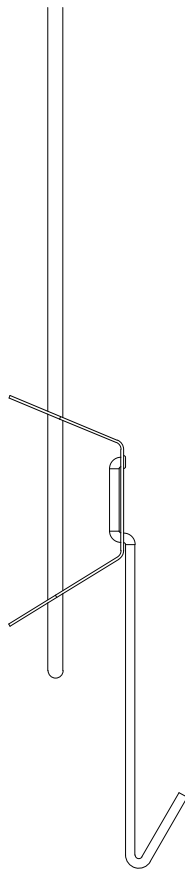


RAPID HANGER  
(non HD) side

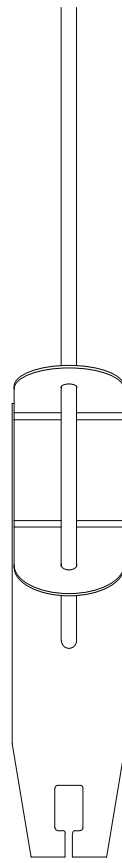


T-PROFILE SUSPENSION  
(non HD) front

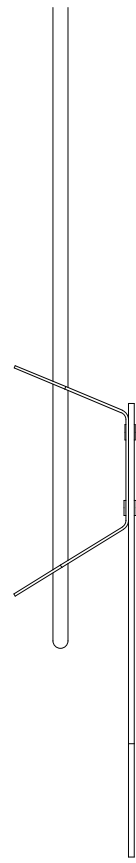

T-PROFILE SUSPENSION  
(non HD) side





EDGE PROFILE 24X24 mm  
(non HD) sec



T-PROFILE 38x24  
(non HD) side



T-PROFILE 38x24  
(non HD) side

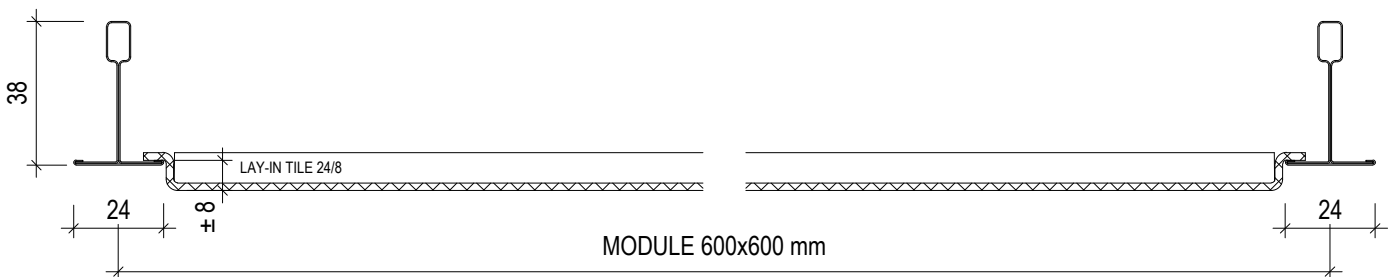

Detail H

Type Stretch Metal	Mat	LW x SW - W x t	Thickness h	Open area	Weight
LS6	Fe	6 x 4,5 - 1,2 x 1,0 mm	1,5 mm	36%	4,2 kg/m <sup>2</sup>
LS8	Fe	8 x 6,0 - 1,2 x 1,0 mm	2,0 mm	54%	3,2 kg/m <sup>2</sup>
LD10	Fe	10 x 5,8 - 1,5 x 1,0 mm	2,0 mm	45%	4,1 kg/m <sup>2</sup>
LD16	Fe	16 x 8,0 - 2,0 x 1,0 mm	3,0 mm	47%	4,0 kg/m <sup>2</sup>

